




轮胎耐撞击性能试验机

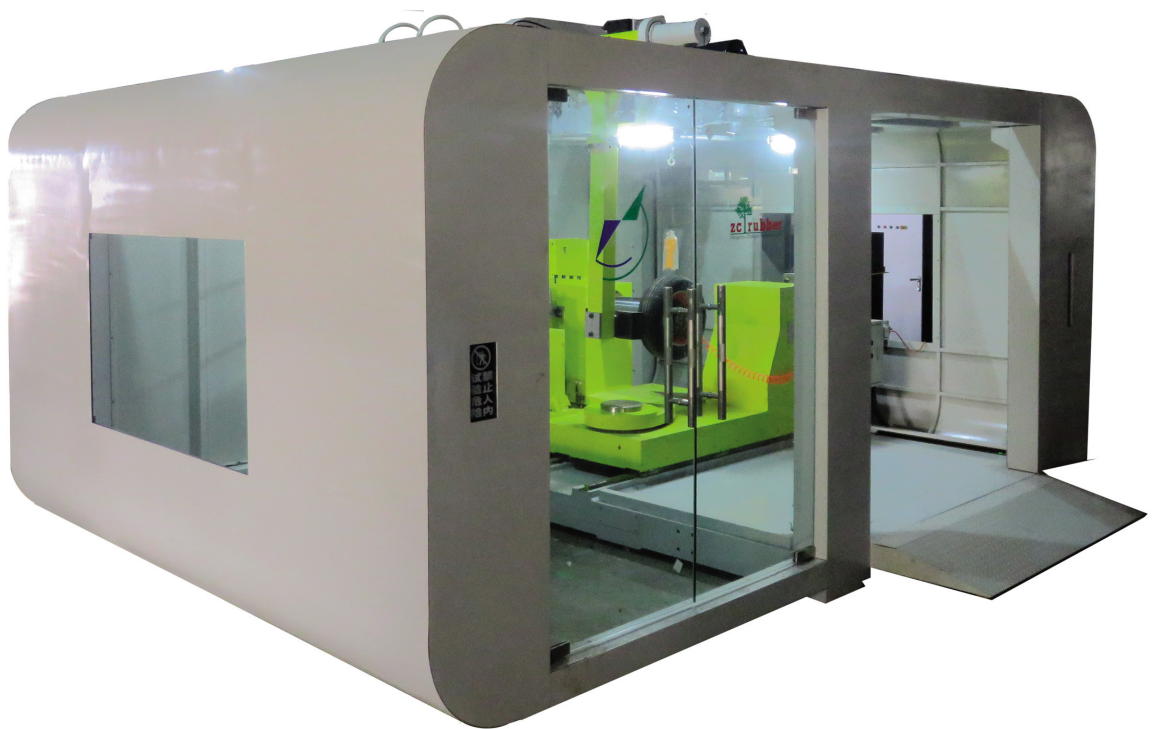

汕头市浩大轮胎测试装备有限公司

SHANTOU HAODA TYRE TEST EQUIPMENT CO., LTD.

地址：广东省汕头市护堤路168号之三

电话：0086-754-82518421 手机：13802719159

网址：www.sthaoda.com 邮箱：sthaoda@163.com



轮胎耐撞击性能试验机

该机器满足SAE J1981:Road Hazard Impact Test for Wheel and Tire Assemblies和GB/T 30195《轮胎耐撞击性能试验方法》对轮胎耐撞击性能测试的要求，用于轿车和轻卡车轮胎耐撞击和抗鼓包性能的评价。


可提供有效的设备和试验技术支持。



撞击装置



撞击高度测量



试验报表



标准讨论

技术特点

- ☆ 高刚度四柱抗震结构设计
- ☆ 低摩擦力机构
- ☆ 伺服电机自动定位
- ☆ 支持大角度（CA角）撞击试验
- ☆ 支持偏心撞击
- ☆ 高精度、高分辨率量测系统
- ☆ 气压检测系统
- ☆ 支持撞击角、撞击势能多种输入
- ☆ 多重安全设计确保试验安全
- ☆ 提供测试技术支持

技术参数


- ☆ 适应轮胎外直径：450~1100mm
- ☆ 最大轮胎断面宽度：450mm
- ☆ 最大撞击动能：6500J
- ☆ 撞击角度定位精度： $\pm 0.06^\circ$
- ☆ 撞击能量分辨率：0.20J
- ☆ 设备外形尺寸：6000×4000×5000mm
- ☆ 重量：16000kg



汕头市浩大轮胎测试装备有限公司
SHANTOU HAODA TYRE TEST EQUIPMENT CO., LTD.



Tire Impacting Performance Testing Machine

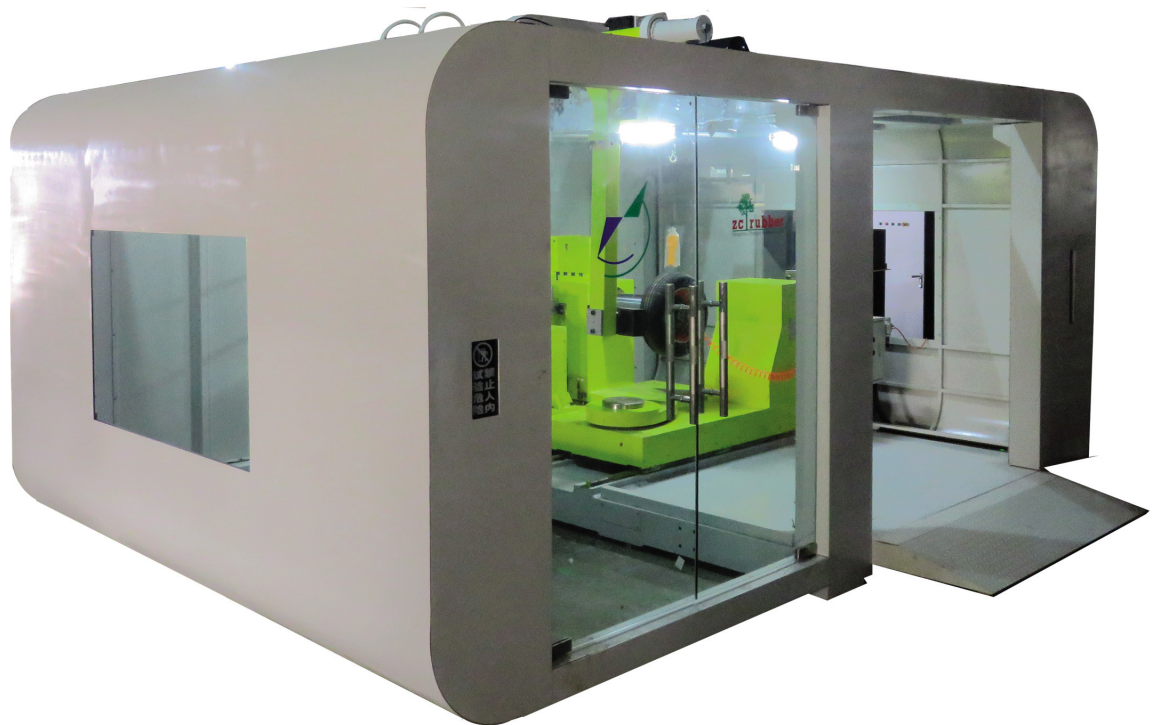

汕头市浩大轮胎测试装备有限公司

SHANTOU HAODA TYRE TEST EQUIPMENT CO., LTD.

Add: Build 3, 168 Hudi Road, Shantou City, Guangdong Province, China

Tel: 0086-754-82518421 Cell: 0086 1380 2719 159

Fax: 0086-754-82518431 E-mail: sthaoda@163.com

www.sthaoda.com



Tire Impacting Performance Testing Machine


This machine is designed specially for tire impact performance test, in compliance with SAE J1981:Road Hazard Impact Test for Wheel and Tire Assemblies, and GB/T 30195:Test method for measuring impact performance of motor vehicle tyres, and other international standards. STHD provides effective technical support for equipment and testing.



Impact Device



Measuring for Bulge Height



Test Report



Standard Discussion

Technical Features:

- ☆ Four-post frame, high stiffness and anti vibration design.
- ☆ Low friction.
- ☆ Servo motor automatic positioning.
- ☆ Supports big angle (CA angle) impact testing.
- ☆ Supports eccentric impact testing.
- ☆ Inflation pressure measuring online.
- ☆ Supports impact angle, impact energy input.
- ☆ Multiple safety designs to ensure the safety of impact testing.
- ☆ Provide test technical support.

Technical Parameters:

- ☆ Tire OD: 450~1100mm
- ☆ Max section width of tire: 450mm
- ☆ Max impact energy: 6500J
- ☆ Positioning accuracy of impact angle: within $\pm 0.06^\circ$
- ☆ Resolution of impact energy: 0.20J
- ☆ Size: 6000×4000×5000mm
- ☆ Weight: 16000kg



汕头市浩大轮胎测试装备有限公司
SHANTOU HAODA TYRE TEST EQUIPMENT CO., LTD.